


Incremental encoder-----GHS52 series

Application & Features:

- ASIC devices internal, good reliability, long life, anti-jamming performance.
- Stainless steel shaft has a higher stability and protection.
- Metal shell is more solid and anti-impact.
- Outlet end use waterproof metal interface protection
- Bearing load heavy, anti-oil and water.
- Applicability to a wide variety of mechanical and industrial control.
- 10 ~ 5000 pulses Optional: (Other pulses available on request)
- High grade protection is optional

Model

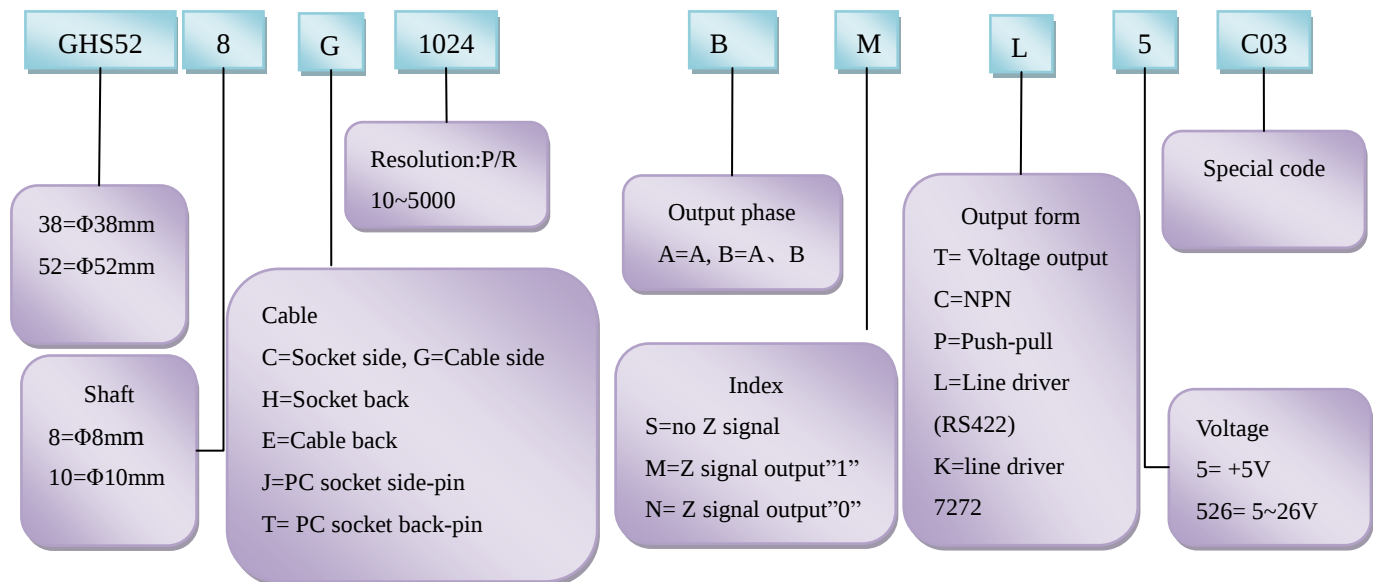



Electrical spec:

Output circuit	Open-collector output	Voltage output	Push-pull complementary outputs	Line driver
Supply voltage	5~26V	5~26V	5±0.25 5~26V	5±0.25 5~26V
Current consumption	≤80mA	≤80mA	≤80mA	≤150mA
Load current	40mA	40mA	40mA	60mA
Output high	Min Vcc*70%	Min Vcc-2.5V	Min Vcc-1.5V	Min 3.4V
Output low	MAX 0.4V	MAX 0.4V	MAX 0.8V	MAX 0.4V
Rise time Tr	MAX 1us	MAX 1us	MAX 1us	MAX 200ns
Fall time Tf	MAX 1us	MAX 1us	MAX 1us	MAX 200ns
Highest frequency response	300kHz	300kHz	300kHz	300kHz

Mechanical spec:

Max speed r/min	Starting torque	Axis maximum load	Impact	Anti-vibration
3000	<0.05Nm	Radial 25 N Axial 15N	50G/11ms	10G 10-2000Hz
Moment inertia	Work Temperature	Storage Temperature	Protection Degree	Weight
4 x 10. ⁻⁵ kgm ²	-30~85°C	-35~85°C	IP54/IP65	250g

Dimensions :

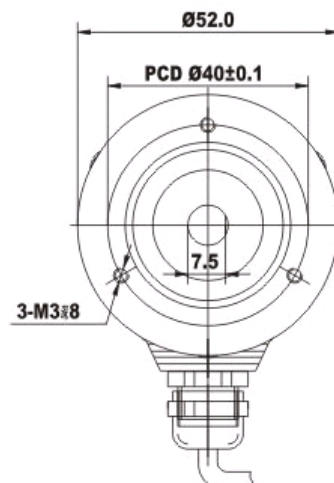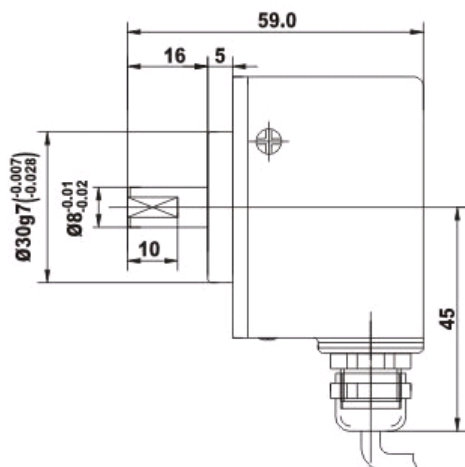

Connections:

Signal	A	B	Z	A-	B-	Z-	Vcc	GND
Color	Green	White	Yellow	Brown	Grey	Orange	Red	Black
Without inverted signal	Green	White	Yellow	-	-	-	Red	Black

Recommended of flexible coupling:

DR Series



BR Series

